


A NEW POINT OF VIEW

FREE5[®] Camera
System

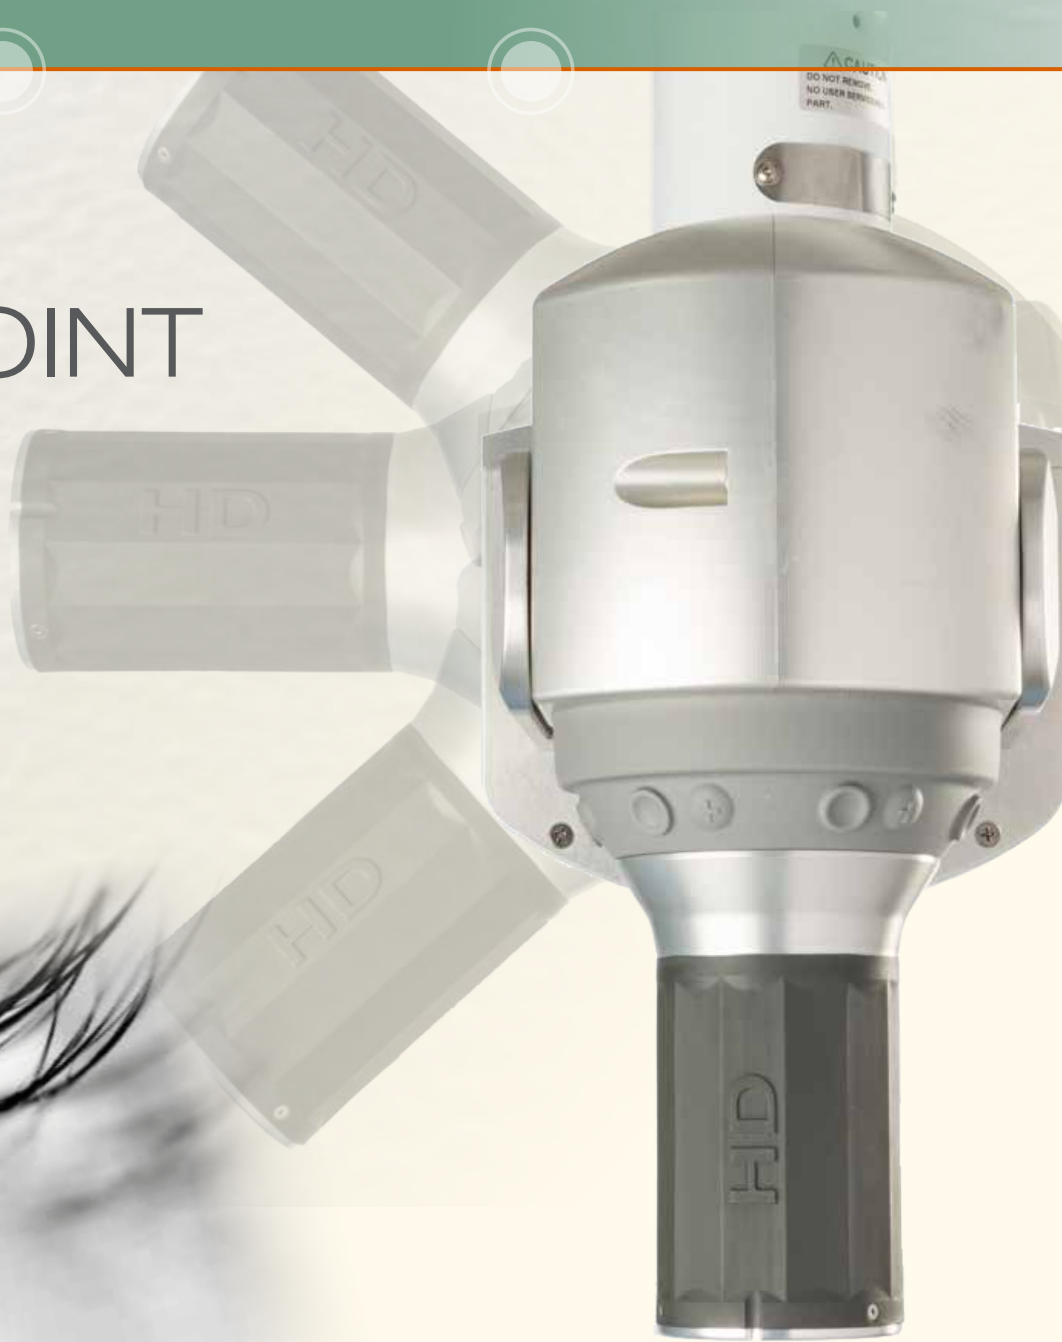

Capture Procedures Without Limitation
From 5 Axes of Control

A NEW POINT OF VIEW



Image is Everything

Whether it is for live viewing or recording, video image quality is vitally important.

The **FREE5 Camera System** provides:

- Superior high definition visualization
- Zoom, focus, and brightness adjustments that meet the needs of a wide range of procedures and environments
- True-to-life color and detail of fine anatomical structures
- Smooth motion without discernible image lag



Pan - swivel the entire camera left to right



Tilt - move the camera up or down



Pivot - move the camera freely in a full



Rotate - spin the image around to get the best view



Zoom - get closer to the surgical site

Positioning Freedom

View and record the surgical site from virtually any orientation and angle.

The unique 4th and 5th axes of pivot and rotate allow extraordinary positioning beyond the traditional pan, tilt and zoom.

The camera moves independently from the rest of the ceiling system.

Position the camera anywhere over or around the surgical table. And once it's positioned, it stays there.

The range of motion of the **FREE5 Camera System** will change your expectation of a medical camera.

Capture the perfect angle for training purposes.

Once you get the camera to the position and angle you desire, you can then use the powered controls to fine tune its position, or zoom and rotate.

Flexibility and Control

STERIS understands your need for open architecture; the Harmony iQ® I BDV Integration Systems control and display images from the FREE5 Camera System, as do any third-party integration systems.

It routes high-definition images to any monitor or recording device in the OR and beyond, and has a combination of automated features and manual modes. For added flexibility, it can be operated through the integration system touch panel or right in the surgical field by using the camera's button controls.



Manufacturer's Recommended Cleaners

STERIS recommends that you protect your investment by cleaning and disinfecting it with **Coverage Spray TB Plus (1629B4)** or **Coverage Spray HB Plus (162477)**.

Feature

HD Camera (LHD0002)

Image Device	1/3-type CMOS
Effective Pixels	Approx. 2,000,000 pixels
Digital Zoom	12x (120x with optical zoom)
Video Output	Y/Pb/Pr
Signal System	50 or 60 Hz
Horizontal Resolution Value	High Definition (1080i)

For more information, contact your STERIS representative or visit www.steris.com.



STERIS Corporation
5960 Heisley Road
Mentor, OH 44060-1834 · USA
800-548-4873
www.steris.com