


| CODICE: | N204ISO2B    |
|---------|--------------|
| DATA:   | January 2013 |
| PAGINA: | 1/4          |





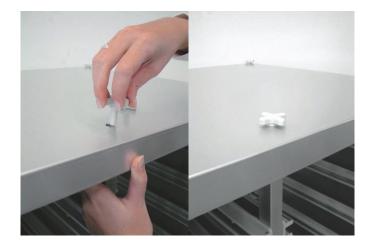

## TECHNICAL DATASHEET

### **Commercial denomination**

# N204ISO2B

### **Description:**

Made with EN AW-5754 UNI EN 573-3 light alloy, anodised after finishing.

Framework in rectangular tubular of 60 x 30 in galvanised hermetic anti-torsion steel. Perimeter lower bumper in aluminium sections fitted with PVC, colour smoke grey, to prevent marking walls.

The body of the trolley is an unique piece of sheet, with vertical terminal edges flapped at the outside, without junctions and/or interstices inside, to guarantee the maximum level of hygiene and cleanness during the washing and sterilisation phase.

The top is in shaped sheet, with dripping in the anterior part, to favour the exit of the water at the exterior of the trolley.

The inside of the trolley is equipped with n.2 vertical compartments <u>with n.9 couples of guides</u> for the baskets; each of them can carry ISO norm baskets 600 x 400 mm. Guides are in nylon fibre glass and stay in vertical light alloy profiles, they can be taken off with extreme facility so that they can be easily cleaned.

In the front side there are n.2 swing doors with closure with vertical bolt with blocking system in the upper and lower part by means of a stainless steel AISI 304 (1.4301) rod; this acts on fusions in self-lubricating nylon fibre glass and is operated by a handle placed centrally the doors. Two continuous and uninterrupted hinges act on the vertical uprights and allow a door opening at 270° with stop parallel to the heads thanks to two magnets in neodymium.

Along the perimeter of the opening side there is a rubber gasket integrated in the structure which creates a barrier against dust (during the closing phase).



| TECHNICAL |
|-----------|
| DATASHEET |

| CODICE: | N204ISO2B    |
|---------|--------------|
| DATA:   | January 2013 |
| PAGINA: | 3/4          |

N.2 pull handles in flat profile are placed on the heads of the trolley for an easy manoeuvrability and movement.

Equipped with n.4 grey anti-mark rubber wheels  $\emptyset$ 200 mm, with supports in galvanized steel (two fix and two swivel), arranged at the corners.

Inner dim.: 895 x 625 x 1190 h mm Outer dim.: 1000 x 710 x 1500 h mm

#### **OPTIONAL**

<u>Cod.TSA</u> Upper bumper in grey PVC





Cod.CHA4 Cardholder A4

Cod.TB Draw bar



| TECHNICAL | CODICE: | N204ISO2B    |
|-----------|---------|--------------|
| DATASHEET | DATA:   | January 2013 |
|           | PAGINA: | 4/4          |

Cod.CHA5 Cardholder A5

Cod.CL Lock with 2 keys

<u>Cod.BD</u> Directional block on 2 wheels

<u>Cod.RR</u> Pedalbrake

Cod.RRC Centralbrake on 2 wheels









